



Environmental Product Declaration



In accordance with
ISO 14025 and UNI EN 15804:2012+A2:2019/AC:2021 for:

CARBON STEEL FLAT PRODUCTS FROM HOT ROLLED AND PICKLED COILS

Marcegaglia Carbon Steel S.p.A

Type of EPD: EPD of multiple products, based on the average results of the product group

Programme: **The International EPD® System**,
www.environdec.com

Programme operator: **EPD International AB**
EPD registration number: **EPD-IES-0031638**
Version date: **2026-04-30**
Validity date **2031-04-29**

*An EPD should provide current information and
may be updated if conditions change.
The stated validity is therefore subject to the
continued registration and publication at
www.environdec.com*

GENERAL INFORMATION	3
PROGRAMME INFORMATION.....	3
COMPANY INFORMATION.....	4
PRODUCTS INFORMATION	4
LCA INFORMATION	5
DESCRIPTION OF MAIN ACTIVITIES.....	6
SYSTEM DIAGRAM	8
CONTENT INFORMATION.....	9
MODULES DECLARED	9
DATA QUALITY.....	10
ENVIRONMENTAL INFORMATION.....	11
CARBON STEEL FLAT PRODUCTS FROM HOT ROLLED AND PICKLED COILS.....	12
ADDITIONAL ENVIRONMENTAL INFORMATION.....	14
VERSION HISTORY	14
ABBREVIATIONS.....	14
REFERENCES.....	15

GENERAL INFORMATION

PROGRAMME INFORMATION

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Standard EN 15804 serves as the Core Product Category Rules (PCR)

Product category rules (PCR):

Construction products, 2019:14, version 2.0.1., CPC 4128

PCR review was conducted by:

The Technical Committee of the International EPD System.

Review chair: Rob Rouwette (chair), Noa Meron (co-chair) – Contact through the secretariat
www.environdec.com/contact

Life Cycle Assessment (LCA)

LCA accountability: Made HSE S.r.l.

Third-party verifier:

Independent third-party verification of the declaration and data, according to ISO 14025, via:

☒ EPD verification by accredited certification body

Third-party verification: *Bureau Veritas Italia S.p.A.* is an approved certification body accountable for the third- party verification

The certification body is accredited by: *Accredia*

Procedure for follow-up of data during EPD validity involves third party verifier:

☒ Yes ☐ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

COMPANY INFORMATION

Owner of the EPD:

Marcegaglia Carbon Steel S.p.A

Contact:

For more information on this product declaration and/or its configurations, the following references are available:

Mail: info.carbonsteel@marcegaglia.com Tel.: +39 0376 6851

Company description:

Marcegaglia Carbon Steel S.p.A. is the company of the Marcegaglia Group that transforms and markets flat products (coils, strips, and sheets) in carbon and pre-painted steel (PPGI) and carbon steel pipes. The company, thanks to advanced production technology and the most modern automation systems, enters the market for the creation of any type of finish on components and accessories, allowing it to satisfy the most demanding and customized requests.

Product/system certifications:

- Quality management system ISO 9001
- Environmental management system ISO 14001
- Health and safety management system ISO 45001
- Energy management system ISO 50001
- Social responsibility management system SA 8000
- Carbon Footprint Product systematic approach ISO 14067
- Organisation Carbon Footprint ISO 14064

Production site's name and localization:

- Gazoldo degli Ippoliti plant: Bresciani street, 16 – 46040 - Gazoldo Degli Ippoliti (MN);
- Ravenna plant: Baiona street, 141 – 48123 – Ravenna (RA).

PRODUCTS INFORMATION

Product name: Flat products from carbon steel hot rolled and pickled coils

Product identification: Coils, strips and sheets from carbon steel hot rolled and pickled coils

Product description:

Starting with carbon steel coils processed entirely within its integrated and controlled production chain, Marcegaglia Carbon Steel manufactures a wide range of flat products, including pickled, cold-rolled, and galvanized coils; pickled, cold-rolled, and galvanized strips; as well as checkered and rusticated sheets.

The company's hot-rolled, cold-rolled, and galvanized coils serve a broad spectrum of industries, including mechanical engineering, packaging, construction, furniture manufacturing, home appliances, and plumbing and heating systems.

The specialized strip range includes grades for deep drawing, semi-processed magnetic steels, and galvanized materials with bright, smooth surfaces tailored for demanding applications such as fine blanking.

Marcegaglia Carbon Steel's flattened sheets are used across various sectors, including construction, urban infrastructure, storage systems, home appliances, mechanical components, and the automotive industry.

Detailed technical specifications for all products are available through the product catalogs on the company's website.

UN CPC code: UN CPC 41231 Flat-rolled products of non-alloy steel, clad, plated, coated or otherwise further worked

Geographical scope: Global

LCA INFORMATION

Declared unit:

The declared unit of the system considered is the ton of flat products.

Reference service life – RSL:

For the products under study it is not possible to quantify the exact useful life as much also depends on their future use. However, it is emphasized that even when the deadline is reached, the product can be recycled and reused again to generate other raw materials.

Time representativeness:

The data used is representative of the year 2025.

Database e software:

Ecoinvent database v.3.11, April 2025 / Software used SimaPro rel. 10.3.0.1

Description of system boundaries:

The study is entitled "Cradle to gate with modules C1–C4 and module D (A1–A3 + C + D)"

Modules A1-A3 cover material procurement processes (raw and auxiliary materials) as well as production processes.

Modules C1-C4 consider the uninstallation, transport, sorting and disposal of components resulting from end-of-life operations of the product. These operations are not directly controllable by the company: in this regard, data from the construction sector are therefore used:

- an average diesel consumption equivalent to 46 MJ for each ton of material demolished;
- an average distance of 80 km to transport the material to the recovery center;
- an average electricity consumption of 28 kWh for each ton of material sorted.

Module D considers the potential for recovery and recycling of steel from end-of-life processes: the calculation of the environmental benefits of steel recovery is based on the guidelines provided in the document "Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012 – Par. 6.3.4.6. Benefits and loads beyond the product system boundary, information Module D".



DESCRIPTION OF MAIN ACTIVITIES

COIL PRODUCTION

The raw material arriving at the Marcegaglia Carbon Steel plant in Ravenna consists of carbon steel coils (almost entirely supplied from the dock on the site) and auxiliary materials.

Auxiliary materials are substances such as hydraulic oils, protective oils, lubricants, paints, pickling products and detergents, which enter as raw materials.

The range of semi-finished and finished products (sheets and strips) is derived from:

- hot rolled or black coils;
- pickled coils.

Pickling

During the pickling process, a treatment is performed on Black Coils which involves immersion of the strip in a hydrochloric acid solution at $18 \div 22\%$ at a temperature of about 80°C in order to eliminate the surface layer and its impurities.

The treatment is carried out on a special automatic system that involves the unwinding of the strip, the induction welding of the tail of the strip during the treatment phase with the head of the next coil/strip, an accumulation floop to guarantee the continuous feeding of the line, the passage to the inside the tanks containing the acid solution and the rewinding of the pickled coil/strip.


The handling of the coils is carried out by means of bridge cranes.

To eliminate the oxides resulting from the oxidation of the material in the hot rolling phase, which constitute an obstacle to the following treatments and to obtain a better quality material, the strip is subjected to the pickling process which consists in the removal of surface impurities.

Service center

The coils coming from different phases of the plant's production cycle are processed on the shearing or flattening lines. From the slitting line, strips of various dimensions are obtained (coil unwinding and longitudinal cutting with subsequent rewinding of the strips thus produced) while from the flattening lines flattened sheets are obtained (coil flattening with subsequent transverse cutting to the desired length and unloading).

SYSTEM DIAGRAM

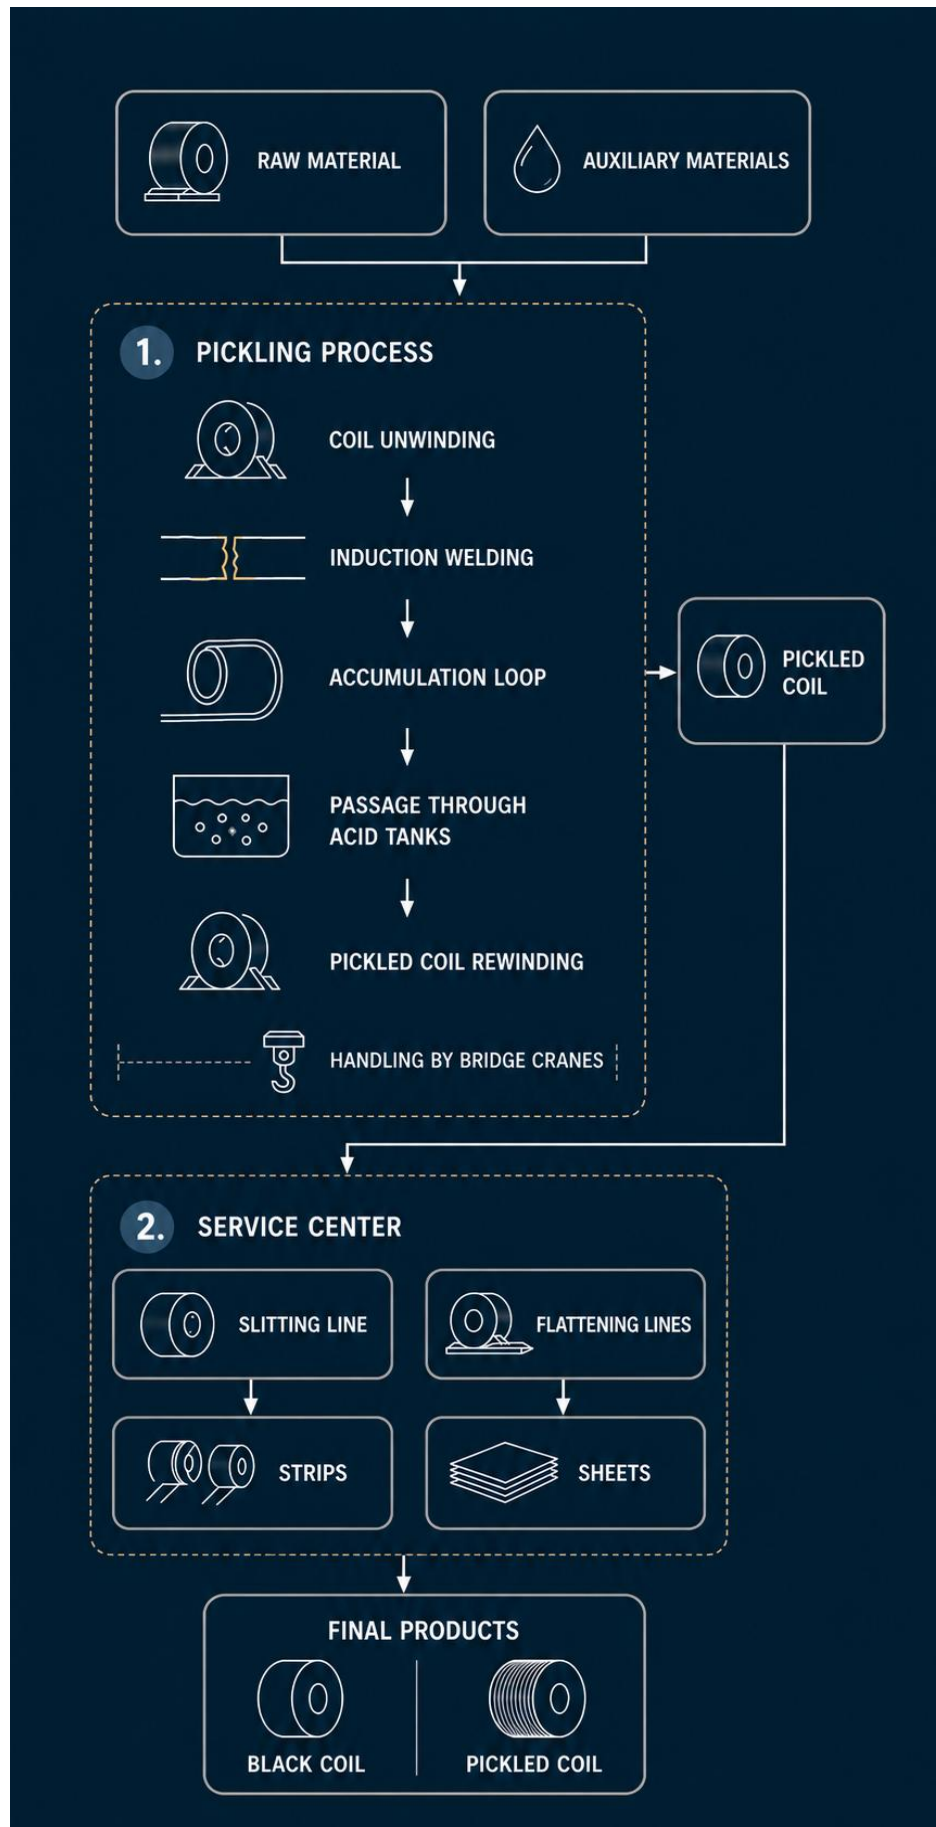

CONTENT INFORMATION

Product content	Weight, kg	Pre and Post-consumer recycled content	Biogenic material, weight-% and kg C/kg
Carbon steel	1,000	19.0%	0

Packaging materials	Weight, kg	Weight-% (versus the product)	Biogenic material, kg C/product or declared unit
plastic	0.2	0.02%	0
wood	6.6	0.66%	5.5
steel	1.9	0.19%	0

The quantities of such packaging in relation to one ton of final product represent less than 1%.

Electricity information

The electricity used in the manufacturing process of module A3 accounts less than 30% of the GWP-GHG results of modules A1-A3. The climate impact of electricity used by Marcegaglia Carbon Steel S.p.A. in module A3 is calculated as a weighted average of the electricity impacts of the different production sites, based on their respective production volumes, and amounts to 0.246 kg CO₂ eq./kWh. The electricity mix is composed of grid electricity almost entirely covered by Guarantees of Origin, on-site photovoltaic systems installed in approximately half of the facilities and cogeneration units.

Allocation rules

An allocation was made on a mass basis for energy consumption, water discharges, atmospheric emissions and waste.

MODULES DECLARED

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	A1-A3 Product stage			A4-A5 Construction process stage		B1-B7 Use stage							C1-C4 End of life stage				D Benefits and loads beyond the system boundary
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	GLO	GLO	IT	-	-	-	-	-	-	-	-	-	GLO	GLO	GLO	GLO	IT
Specific data	67.9%					-	-	-	-	-	-	-	-	-	-	-	-
Variations-product	-3.7% / +4.6%					-	-	-	-	-	-	-	-	-	-	-	-
Variations-site	<10%					-	-	-	-	-	-	-	-	-	-	-	-

X = Module considered

ND = Module not declared

GLO = Global

IT = Italy

DATA QUALITY

Data quality was assessed in accordance with EN15804+A2 and the General Programme Instructions of the International EPD System (version 5.0.1, Annex A).

The EPD is based on data collected by Marcegaglia over a one-year period (2025). It is a representation of the production of carbon steel flat products from hot rolled and pickled coils.

The EPD incorporates both primary data collected directly from the company and secondary data come from Ecoinvent database. The quality of the data assessed in terms of temporal coverage, geographical, and technological representativeness is rated as Good.

Life cycle stage	Data contribution to GWP [%]	Geographical representativeness	Temporal representativeness	Technological representativeness
A1	64.6%	Good	Very good	Good

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP-GHG results for A1-A3
Manufacturing of product	Collected data	EPD owner	2025	Primary data	1%
Generation of electricity used in manufacturing of product	European Residual Mixes 2024 Association of Issuing Bodies	AIB Version 2.0, 2025-08-26	2024	Primary data	0.14%
Transport of steel to manufacturing site	Database	Ecoinvent v3.11	2007/2015	Primary data	2.09%
Production of steel	Declaration/EPD	EPD Uni Pdr 88/2020	2025	Primary data	64.6%
Production of packaging	Database Collected data	Ecoinvent v3.11 EPD owner	2018	Primary data, secondary data	0.1%
Total share of primary data, of GWP-GHG results for A1-A3					67.9%

ENVIRONMENTAL INFORMATION

The environmental performance indicators refer to 1 ton of flat products. The characterization factors used in this assessment are based on EN 15804+A2 - EF 3.1, which provide a method for quantifying the environmental impact.

Environmental impact

Impact category	Abb.	Unit
Climate change - total	GWP - t	kg CO ₂ eq
Climate change - Fossil	GWP - fossil	kg CO ₂ eq
Climate change - Biogenic	GWP - biogenic	kg CO ₂ eq
Climate change - Land use and LU change	GWP - luluc	kg CO ₂ eq
Climate change - Greenhouse Gases	GWP - GHG	kg CO ₂ eq.
Ozone depletion	ODP	kg CFC11 eq
Photochemical ozone formation	POCP	kg NMVOC eq
Acidification of land and water	AP	mol H ⁺ eq
Eutrophication	EP - freshwater	kg P eq
	EP - marine	kg N eq
	EP - terrestrial	mol N eq
Water use *	WDP	m ³ depriv.
Resource use, fossils *	ADP - F	MJ
Resource use, minerals, and metals *	ADP - MM	kg Sb eq

** The results of this environmental impact indicator shall be used with care as the uncertainties of the results are high and as there is limited experience with the indicator.*

Resource use

Impact category	Abb.	Unit
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	PERE	MJ
Use of renewable primary energy resources used as raw materials	PERM	MJ
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	PERT	MJ
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	PENRE	MJ
Use of non-renewable primary energy resources used as raw materials	PENRM	MJ
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	PENRT	MJ
Use of secondary material	SM	kg
Use of renewable secondary fuels	RSF	MJ
Use of non-renewable secondary fuels	NRSF	MJ
Use of net fresh water	FW	m ³

Waste production

Impact category	Abb.	Unit
Hazardous waste disposed	HW	kg
Non-hazardous waste disposed	NHW	kg
Radioactive waste disposed	RW	kg

Output flows

Impact category	Abb.	Unit
Reuse	REUSE	kg
Materials for recycling	RECYCLE	kg
Materials for energy recovery	EN-REC	kg
Exported energy-electricity	EE-E	MJ
Exported energy-thermal energy	EE-T	MJ

CARBON STEEL FLAT PRODUCTS FROM HOT ROLLED AND PICKLED COILS

Abb.	Unit	A1-A3	C1	C2	C3	C4	D
GWP - t	kg CO ₂ eq	2.53E+03	4.63E+00	1.15E+01	1.50E+01	7.13E-01	-1.26E+03
GWP - fossil	kg CO ₂ eq	2.54E+03	4.63E+00	1.15E+01	1.49E+01	7.12E-01	-1.25E+03
GWP - biogenic	kg CO ₂ eq	-4.53E+00	9.29E-04	7.27E-03	7.35E-02	4.44E+00	-1.43E+01
GWP - luluc	kg CO ₂ eq	1.23E+00	4.74E-04	3.95E-03	1.47E-03	4.08E-04	-8.01E-01
GWP - GHG	kg CO ₂ eq	2.54E+03	4.63E+00	1.15E+01	1.49E+01	7.13E-01	-1.25E+03
ODP	kg CFC-11 eq	1.23E-05	6.87E-08	2.51E-07	3.23E-07	1.98E-08	-6.07E-06
POCP	kg NMVOC eq	1.15E+01	6.31E-02	5.78E-02	3.98E-02	7.55E-03	-4.19E+00
AP	mol H ⁺ eq	9.83E+00	4.14E-02	3.74E-02	5.26E-02	4.99E-03	-5.38E+00
EP - freshwater	kg P eq	1.03E+00	1.49E-04	7.97E-04	3.50E-03	6.23E-05	-7.35E-01
EP - marine	kg N eq	2.42E+00	1.93E-02	1.26E-02	9.90E-03	1.91E-03	-1.22E+00
EP - terrestrial	mol N eq	2.41E+01	2.11E-01	1.38E-01	1.03E-01	2.09E-02	-1.25E+01
WDP	m ³ depriv.	6.54E+02	1.74E-01	8.78E-01	1.73E+00	7.74E-01	-3.33E+02
ADP - F	MJ	2.54E+04	6.03E+01	1.65E+02	2.27E+02	1.74E+01	-7.63E+03
ADP - MM	kg Sb eq	1.10E-02	1.61E-06	3.62E-05	1.19E-05	1.04E-06	-9.30E-03
PERE	MJ	2.95E+03	3.78E-01	2.63E+00	1.16E+01	1.63E-01	-1.32E+03
PERM	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	2.95E+03	3.78E-01	2.63E+00	1.16E+01	1.63E-01	-1.32E+03
PENRE	MJ	2.54E+04	6.03E+01	1.65E+02	2.27E+02	1.74E+01	-7.63E+03
PENRM	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	2.54E+04	6.03E+01	1.65E+02	2.27E+02	1.74E+01	-7.63E+03
SM	kg	2.75E+02	2.49E-02	7.23E-02	2.73E-02	4.34E-03	-1.30E+02
RSF	MJ	2.65E+00	6.54E-05	9.50E-04	1.79E-04	9.06E-05	-7.94E-02
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m ³	2.45E+01	4.25E-03	2.16E-02	4.13E-02	1.81E-02	-9.35E+00
HW	kg	1.05E+03	6.76E-02	2.39E-01	5.98E-01	1.99E-02	-4.70E+02
NHW	kg	9.62E+03	9.85E-01	5.02E+00	1.80E+01	4.59E-01	-5.50E+03
RW	kg	2.27E-02	6.30E-06	4.74E-05	2.81E-04	2.54E-06	-5.67E-03
REUSE	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RECYCLE	kg	4.35E+00	2.68E-04	1.99E-03	1.27E-02	1.89E-04	-3.75E-01
EN-REC	kg	1.09E-02	8.57E-07	9.20E-06	3.17E-06	3.36E-07	-2.97E-03
EE-E	MJ	9.56E+00	2.85E-03	3.06E-02	1.14E-02	1.13E-03	-2.07E+00
EE-T	MJ	1.55E+01	1.34E-03	3.57E-02	1.16E-02	6.01E-04	-3.91E+00

- Additional impact results for 100% Landfill end-of-life scenarios:

Abb.	Unit	A1-A3	C1	C2	C3	C4	D
GWP - t	kg CO ₂ eq	2.53E+03	4.63E+00	1.15E+01	1.50E+01	6.26E+00	0.00E+00
GWP - fossil	kg CO ₂ eq	2.54E+03	4.63E+00	1.15E+01	1.49E+01	6.26E+00	0.00E+00
GWP - biogenic	kg CO ₂ eq	-4.53E+00	9.29E-04	7.27E-03	7.35E-02	3.01E-03	0.00E+00
GWP - luluc	kg CO ₂ eq	1.23E+00	4.74E-04	3.95E-03	1.47E-03	3.58E-03	0.00E+00
GWP - GHG	kg CO ₂ eq	2.54E+03	4.63E+00	1.15E+01	1.49E+01	6.26E+00	0.00E+00
ODP	kg CFC-11 eq	1.23E-05	6.87E-08	2.51E-07	3.23E-07	1.74E-07	0.00E+00
POCP	kg NMVOC eq	1.15E+01	6.31E-02	5.78E-02	3.98E-02	6.63E-02	0.00E+00
AP	mol H+ eq	9.83E+00	4.14E-02	3.74E-02	5.26E-02	4.38E-02	0.00E+00
EP - freshwater	kg P eq	1.03E+00	1.49E-04	7.97E-04	3.50E-03	5.48E-04	0.00E+00
EP - marine	kg N eq	2.42E+00	1.93E-02	1.26E-02	9.90E-03	1.68E-02	0.00E+00
EP - terrestrial	mol N eq	2.41E+01	2.11E-01	1.38E-01	1.03E-01	1.84E-01	0.00E+00
WDP	m ³ depriv.	6.54E+02	1.74E-01	8.78E-01	1.73E+00	6.80E+00	0.00E+00
ADP - F	MJ	2.54E+04	6.03E+01	1.65E+02	2.27E+02	1.53E+02	0.00E+00
ADP - MM	kg Sb eq	1.10E-02	1.61E-06	3.62E-05	1.19E-05	9.11E-06	0.00E+00

- Additional impact results for 100% Recycling end-of-life scenarios:

Abb.	Unit	A1-A3	C1	C2	C3	C4	D
GWP - t	kg CO ₂ eq	2.53E+03	4.63E+00	1.15E+01	1.50E+01	0.00E+00	-2.03E+03
GWP - fossil	kg CO ₂ eq	2.54E+03	4.63E+00	1.15E+01	1.49E+01	0.00E+00	-2.02E+03
GWP - biogenic	kg CO ₂ eq	-4.53E+00	9.29E-04	7.27E-03	7.35E-02	0.00E+00	-3.27E+00
GWP - luluc	kg CO ₂ eq	1.23E+00	4.74E-04	3.95E-03	1.47E-03	0.00E+00	-1.29E+00
GWP - GHG	kg CO ₂ eq	2.54E+03	4.63E+00	1.15E+01	1.49E+01	0.00E+00	-2.03E+03
ODP	kg CFC-11 eq	1.23E-05	6.87E-08	2.51E-07	3.23E-07	0.00E+00	-9.77E-06
POCP	kg NMVOC eq	1.15E+01	6.31E-02	5.78E-02	3.98E-02	0.00E+00	-6.78E+00
AP	mol H+ eq	9.83E+00	4.14E-02	3.74E-02	5.26E-02	0.00E+00	-8.70E+00
EP - freshwater	kg P eq	1.03E+00	1.49E-04	7.97E-04	3.50E-03	0.00E+00	-1.19E+00
EP - marine	kg N eq	2.42E+00	1.93E-02	1.26E-02	9.90E-03	0.00E+00	-1.97E+00
EP - terrestrial	mol N eq	2.41E+01	2.11E-01	1.38E-01	1.03E-01	0.00E+00	-2.02E+01
WDP	m ³ depriv.	6.54E+02	1.74E-01	8.78E-01	1.73E+00	0.00E+00	-6.27E+02
ADP - F	MJ	2.54E+04	6.03E+01	1.65E+02	2.27E+02	0.00E+00	-2.14E+04
ADP - MM	kg Sb eq	1.10E-02	1.61E-06	3.62E-05	1.19E-05	0.00E+00	-1.49E-02

ADDITIONAL LCA RESULTS OF THE PRODUCT

The grouping of these products within a single EPD is considered appropriate, as they belong to similar raw material family. Variations above 10% are therefore justified and transparently reported in the LCA results, in accordance with the applicable EPD requirements.

LCA result of one declared unit product (A-C)	Unit	Min	Max
GWP - t	kg CO2 eq	-3.7%	4.6%
GWP - fossil	kg CO2 eq	-3.9%	4.8%
GWP - biogenic	kg CO2 eq	-104.1%	155.0%
GWP - luluc	kg CO2 eq	-19.1%	11.1%
GWP - GHG	kg CO2 eq	-3.9%	4.8%
ODP	kg CFC11 eq	-37.0%	25.7%
POCP	kg NMVOC eq	-6.7%	7.1%
AP	mol H+ eq	-3.9%	4.2%
EP - freshwater	kg P eq	-5.3%	6.9%
EP - marine	kg N eq	-4.8%	4.0%
EP - terrestrial	mol N eq	-4.1%	4.3%
WDP	m3 depriv.	-9.6%	10.1%
ADP - F	MJ	-3269.9%	6.7%
ADP - MM	kg Sb eq	-6.0%	32.9%

ADDITIONAL ENVIRONMENTAL INFORMATION

The steel used has an average recycled content of 19%: this percentage is calculated as a weighted average of the incoming raw material (from Type III environmental declarations). The steel supplies come from blast furnace (with an average recycled content of 12.6%) or from an electric arc furnace (with an average recycled content of 76.7%).

Regardless of the type of product considered, the element that most affects the final result is the purchased steel. It should be noted that at the end of its useful life, the product is destined for recycling. In particular, the amount of steel destined for recycling is 88.8 % in line with what is indicated in the "Special waste report" of ISPRA – No. 416/2025.

The products do not contain hazardous substances from the SVHC Candidate List for Authorization in quantities greater than 0.1%.

VERSION HISTORY

This is the original version of EPD according to PCR 2019:14 Construction products (EN 15804+A2) vers. 2.0.1 and General Programme Instructions of the International EPD® System. Version 5.0.1.

ABBREVIATIONS

Abbreviation	Definition
EN	European Norm (Standard)
GPI	General Programme Instructions
ISO	International Organization for Standardization
CEN	European Committee for Standardization
CPC	Central product classification
SVHC	Substances of Very High Concern
ND	Not Declared
D	Declared

REFERENCES

- General Programme Instructions of the International EPD® System. Version 5.0.1;
- PCR 2019:14 Construction products (EN 15804+A2) vers. 2.0.1 (2025-06-05) ;
- Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012;
- Ecoinvent database v.3.11 – April, 2025;
- ISO 14025: 2010 “Environmental labels and declarations - Type III environmental declarations - Principles and procedures”;
- ISO 14040:2021 “Environmental management - Life cycle assessment - Principles and framework”;
- ISO 14044:2021 “Environmental management - Life cycle assessment - Requirements and guidelines”;
- ISO 15804:2021 “Sustainability of buildings - Environmental product declarations - Development framework rules by product category”;
- CSIRO “Metal recycling: The need for a life cycle approach” – May 2013;
- IFEU-Institut and Sineco “Recovery of demolition materials of CaseClima” – September 2012;
- European Residual Mixes 2024 Association of Issuing Bodies “European Residual Mixes Results of the calculation of Residual Mixes for the calendar year 2024” – 2025-05-30;
- ISPRA “ Special waste report” – n° 416/2025 – Ed. 2025.



Registered seat:

Via Bresciani, 16 - 46040

Gazoldo degli Ippoliti (MN) – Italy

Main offices and plants:

Via Baiona, 141 – 48123

Ravenna (RA) – Italy

Via Bresciani, 16 - 46040

Gazoldo degli Ippoliti (MN) – Italy

Phone +39 0376 6851

info.carbonsteel@marcegaglia.com



 **EPD**
INTERNATIONAL EPD SYSTEM